



GENERAL NOTES:


1. Concrete: 28 Day Compressive Strength  $f'_c = 5,000$  psi
2. Steel Reinforcement: ASTM A-615, Grade 60
3. Cover to Steel-1" Minimum
4. Vaults are Designed to Meet ASTM C858 and ACI 318 with AASHTO HS-20 Loading
5. Earth Cover-0 to 5 Feet Max.
6. Construction Joint Sealed with 1" Dia. Butyl Rubber or Equivalent
7. Wall Thickness 6"
8. \*Earth Cover On 10'-6" ID Vault Is 0' to 3' MAX.

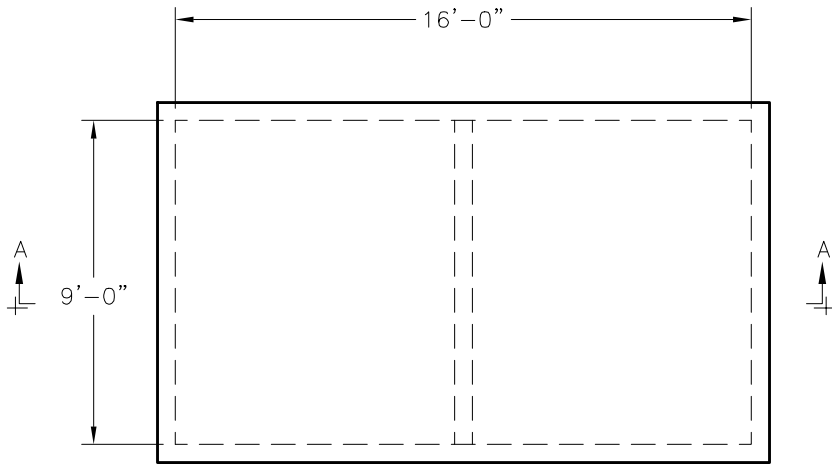

**PLAN VIEW**

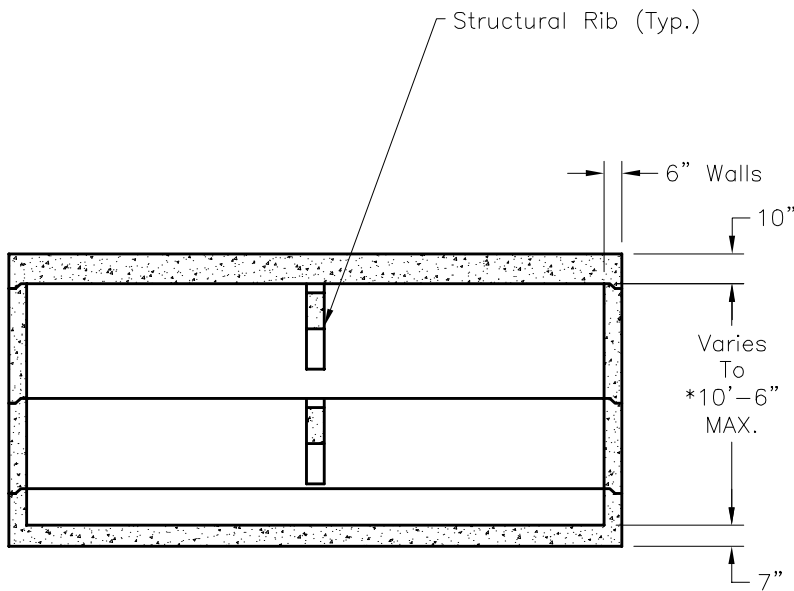

**SECTION A-A**

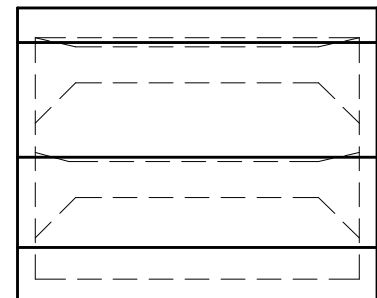

**END VIEW**



**Oldcastle Precast®**

**MH9X16**

FILE NAME: 324UCPMH9X16\_DET.DWG

ISSUE DATE: January, 2008

[www.oldcastleprecast.com](http://www.oldcastleprecast.com)

**9'-0" x 16'-0" x Variable I.D.  
Utility Vault**

Copyright © 2008 **Oldcastle Precast®**